


Accepts jacketed cable up to 1/4" diameter.
 For wood and metal doors and frames.
 Intended for door openings less than 120 degrees.
 Not intended for center hung door applications.

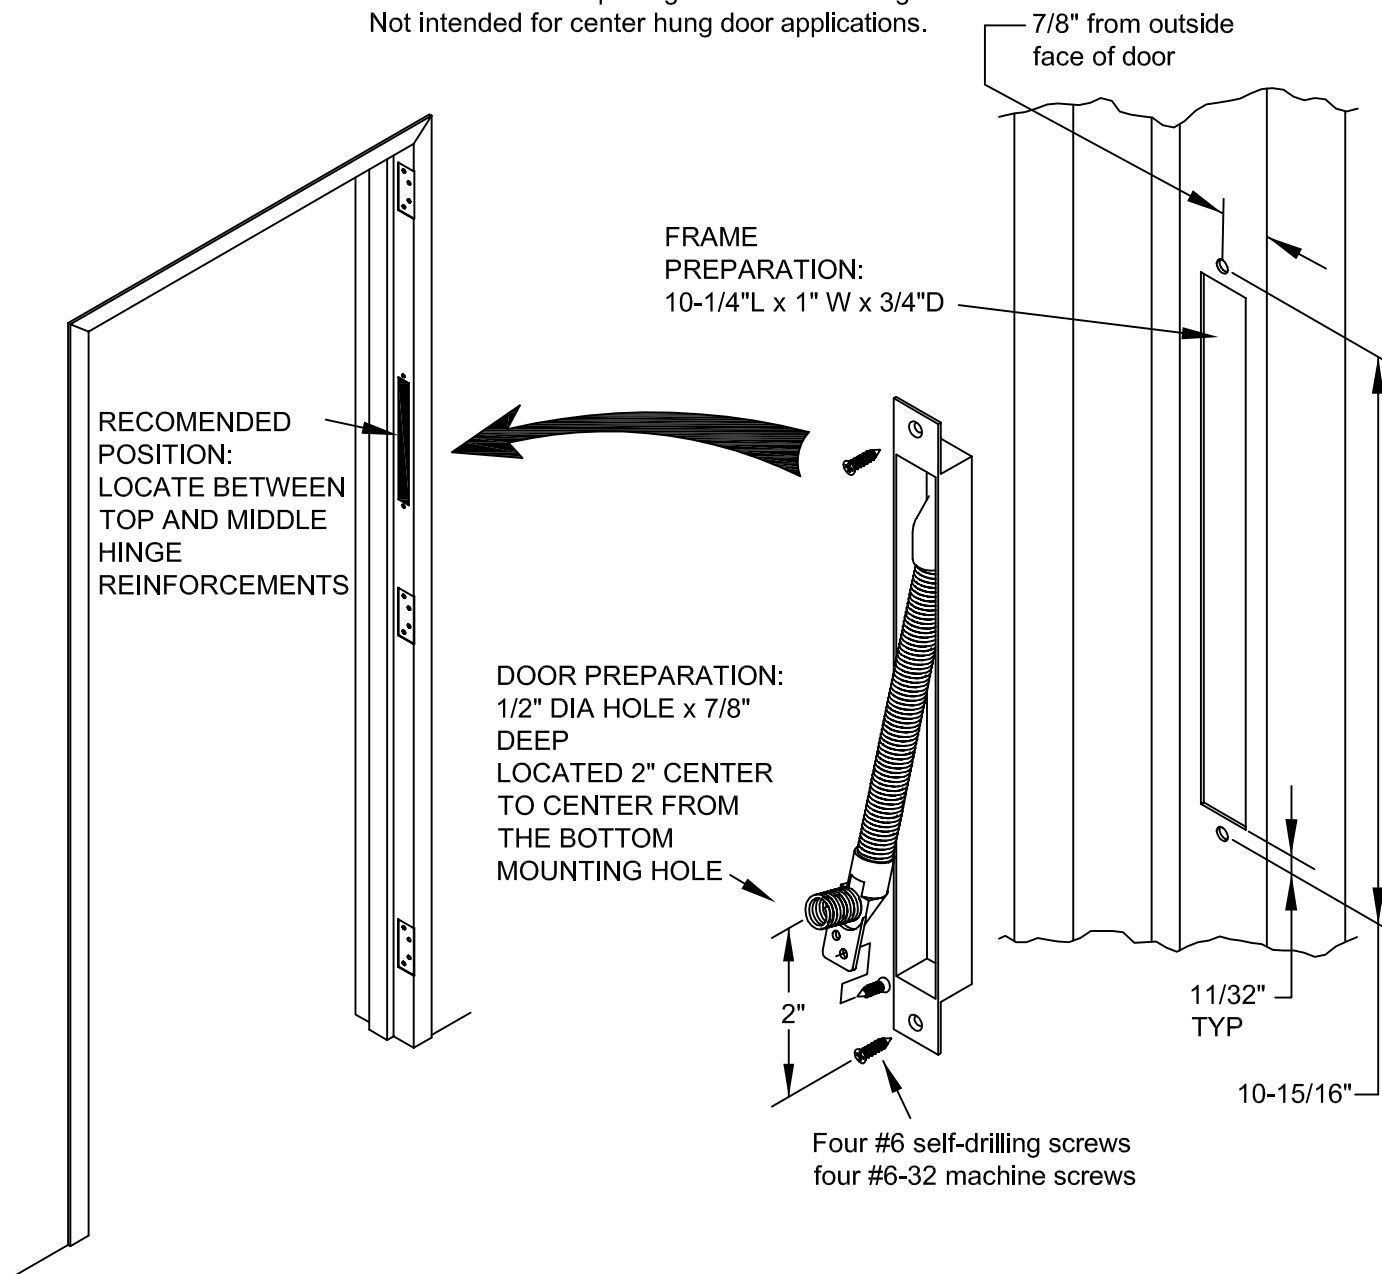

HDG. _____ DR. _____

RESPONSIBILITY
 Door and Frame Manufacturers are responsible for providing adequate construction or reinforcements for proper installation of hardware shown. All architectural builders hardware must be installed on properly reinforced doors and frames regardless of the type, material or method of construction.

TEMPLATE
 DETEX PT-5
 POWER TRANSFER

DETEX[®]

DO NOT SCALE DRAWING

DATE	10-5-11	TEMPLATE NUMBER	T1204
------	---------	-----------------	-------